

Everything you need
to know about SIPs

 **BASF**

The Chemical Company



What are SIPs?

Ready made. High-performance. Contributors to stronger, more energy efficient, comfortable, cost-effective homes and buildings. Is it any wonder that Structural Insulated Panels (SIPs) are rapidly gaining in popularity within the new construction market?

SIPs are walls, roofs, floors and foundations made of panels consisting of a rigid foam insulation core sandwiched between two structural skins. The seamless, closed-cell rigid foam core helps reduce air leakage and thermal bridging through the panels by providing a continuous span of insulation. BASF SIPs core technologies include:

- STYROPOR® expandable polystyrene (EPS)
- ELASTOPOR® and AUTOFROTH® polyurethane
- Custom formulations from BASF Polyurethane Foam Enterprises LLC
- Polyisocyanurate

BASF ELASTOTITE® polyurethane adhesives are used to glue EPS foam cores to the structural skins.

Standard panels are available in 4' x 8' or 8' x 24' configurations. Thicknesses typically range from 4.5" to 12.25" but custom sizes and thicknesses are also available. Once manufactured, the panels are shipped directly to the construction site for fast and easy installation.

How are they made?

Panels begin life in the factory. CAD drawings of the structure to be built are converted to shop drawings, which are then plugged directly into computer numerical control (CNC) fabrication machines or are used to measure and cut the panels by hand.

Special channels (chases) are cut into the foam to allow for the electrical wiring, and the insulation core is recessed around the edges to accept the connection splines or dimensional lumber used during construction.

BASF offers AUTOFROTH® SL dispensing equipment for polyurethane foam SIPs, with a low capital investment and proven field performance at hundreds of locations across North America. BASF Polyurethane Foam Enterprises also offers custom-built equipment to fit your exact needs.

Are SIPs cost effective?

Building with SIPs offers cost advantages to the builder in terms of speed of construction and reduced labor requirements. Panels are pre-manufactured to exact specifications so they arrive ready to install and come together quickly.


A recent Time & Motion study conducted by Reed Construction Data RSMMeans Business Solutions showed that utilizing SIPs reduced installation time by 130 labor hours. When compared to RSMMeans labor hours for a conventionally framed home, this labor requirement is equivalent to time savings of approximately 55 percent.¹

The house used for the study was a two-story, three-bedroom, 1,176-square-foot, cape-style home with three dormers on a 12/12-pitch roof. RSMMeans cost data was used to benchmark the time and cost for erecting conventionally-framed stud walls, roofs and dormers using exterior sheathing and fiberglass batt insulation.

Thanks to this speed of construction, SIPs projects are dried-in sooner. There are fewer hand-offs between trades so crews are more productive – no more waiting for the insulation group to come in after the framers, or for the sheathers to come after the insulators.

SIP walls are flat and don't warp, expand or contract, so doors and windows go in quickly as designed. All wall intersections are true so cabinets install fast. It all adds up to reduced special field adjustments and lots of saved time. Perhaps most importantly, these technologies can help reduce call-backs, keeping crews moving forward to the next project and improving overall productivity.

Chart for Actual Installed Time Comparison (hours)

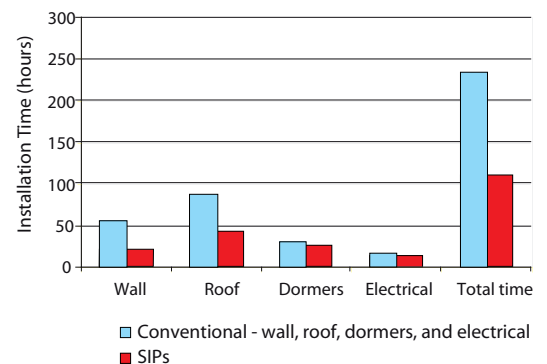

Component	SIP-Built	2"x4" Stick-Built
Wall	24.8	78.12
Roof	50.8	117.48
Dormer	31.33	41.87
Electrical	18.76	21.11
Total Labor Hours	125.69	258.58

Breakdown of labor requirements

Component	SIP-Built	2"x4" Stick-Built
Wall	\$1,372 (\$0.97/ft ²)	\$3,331 (\$2.37/ft ²)
Roof	\$2,816 (\$1.63/ft ²)	\$4,498 (\$2.60/ft ²)
Dormer	\$1,735 (\$2.86/ft ²)	\$1,765 (\$2.91/ft ²)
Electrical	\$870	\$979
Total Labor Cost	\$6,793	\$10,573

Breakdown of labor costs

Are SIPs sustainable?


SIPs help raise the social, economic and environmental responsibility of homes and buildings, making a significant contribution toward true sustainability.

The award-winning² and 3rd party validated BASF Eco-efficiency methodology compares the “cradle-to-grave” environmental and total cost impact of product or processes over their entire life cycle. In a recent evaluation, of residential insulation systems, SIP-built structures made with EPS or polyurethane cores with OSB facers were the clear winners over 2x4 or 2x6 stick construction with fiberglass batt insulation.

Key contributors to the performance of SIPs in this study include:

- Reduced heating and cooling loads over lifetime of home
 - High R-value
 - Low air leakage rate
- Low environmental impact of materials
- Low maintenance requirements
- Lightweight materials reduce transportation fuel use

Eco-Efficiency Analysis results for the construction and 60-year use of the walls and roof of base case: 1,100 square foot residence in Newark, NJ (Zone 4).

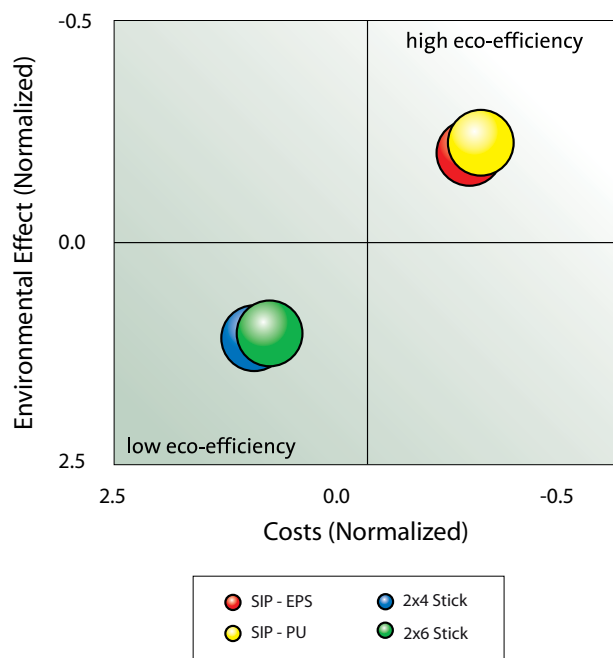




SIPs can help the environment, make your home more comfortable and save you money

- **Greenhouse Gases**—SIPs help reduce greenhouse gases in the atmosphere. Studies have shown they can reduce 108,412,526 grams of carbon dioxide emitted into the atmosphere, the equivalent of the amount of CO₂ uptake by 136 acres of 25-year-old forest.
- **Cost Savings**—More money in your pocket at the end of the month. For a typical home, SIPs may add about \$5,450 to the overall construction costs. However, they will save the homeowner an average of \$29.32 a month in energy costs, while increasing mortgage costs only \$25 a month.
- **Lower HVAC Costs**—SIP-built homes require smaller HVAC systems, saving an average of \$782 in mechanical costs up-front.
- **Resources Savings**—While it requires three barrels of oil to produce the SIP insulation panel materials, the SIPs panels will reduce energy requirements for the home by 290 barrels of oil over the lifecycle of the home (base case: 1,100 square foot residence with polyurethane core SIPs in Northeastern Zone 4).

In addition to its Eco-Efficiency performance, BASF STYROPOR EPS used as SIP cores is GreenGuard® indoor air quality certified and a cradle-to-cradle (C2C) technical nutrient assessed by MBDC (McDonough Baumgart Design Chemistry).

For more information on the Eco-Efficiency Analysis methodology or to obtain detailed results, please visit www.basf.com/usa.

Overall lifecycle cost results by insulation system.

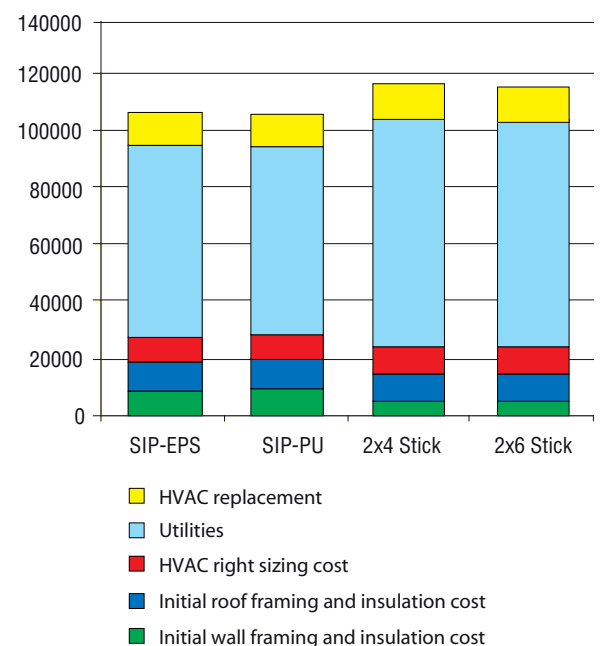

Do SIPs contribute to building performance?

SIPs help deliver on several key benefits that help you give your customers a better home or building.



Energy efficiency

SIPs combine superior insulation with near-zero air leakage to maximize the performance of the building envelope and allow HVAC systems to operate more effectively. You also get:

- Reduced energy consumption³
- Lower energy bills
- 90 percent less air leakage than stick-framed structures
- No thermal bridging or convection looping

SIPs make such a large contribution to energy efficiency that two of the first three LEED® Platinum homes in the United States were built with SIP envelopes. ENERGY STAR® exempts SIP-built homes from the 17-point thermal bypass insulation inspection and blower door tests required for qualification in the program.

Whether your goal is 'green' or avant garde design, disaster resistance or near-zero energy, SIPs bring several key benefits to your project.



Durability

SIPs help improve structural strength for resistance to natural disasters. You also get:

- Structural characteristics similar to a steel I-Beam
- Superior structural stability with stiffness, strength, and predictable performance
- Lower maintenance requirements

SIPs make it easy to build a home that is designated *Fortified...for safer living*[®], making it eligible for significant reductions in insurance premiums. In fact, the *Fortified...for safer living* program is sponsored by the Institute for Business & Home Safety, an insurance industry initiative.

Occupant comfort, health and safety

SIPs help make indoor environments healthier, safer, more comfortable and more enjoyable. You also get:

- Increased control over temperature and humidity levels – the upstairs of a SIP house is rarely more than one degree warmer than downstairs
- Significantly reduced drafts
- Improved sound transfer control – even near airports, highways and inner urban areas
- Improved indoor air quality with low VOCs or infiltration of allergens or pollutants (the American Lung Association and the Environmental Protection Agency [EPA] both recommend that houses be built airtight to help improve indoor air quality)

SIPs help reduce the risk of mold growth by stopping condensation and moisture movement within the walls. Foam core materials like polyurethane and polystyrene are almost water impermeable and do not offer a food source for mold.



Affordability

SIPs help make homes and buildings more affordable to own. In 2005, the average household spent \$4,443 on energy⁴. SIPs help significantly reduce energy consumption and reduce that average household's annual energy cost by as much as \$2,665. You also get:

- Lower construction costs
- Lower landfill fees through reduced construction waste
- Lower maintenance requirements
- Ability to downsize HVAC equipment at the design phase

Because of their supreme energy efficiency, many SIP projects are eligible for special mortgage rates and government incentives. And thanks to the inherent durability of SIP-built structures, maintenance requirements are lower.



Design freedom

Rounded roofs, arched windows and other complex designs are made simple with engineered SIPs. The manufacturing process means that no design element is too hard to accomplish. You also get:

- CNC cutting machines capable of cutting almost any shape or size of panel
- Reduced complexity of measurement and mathematics
- Open and airy feel with no need for false ceilings
- Ability to maximize daylighting design techniques

Even interior decorators get added freedom. Hang a picture anywhere on the wall. No more searching for – and being confined to – a supporting stud to secure the nail. Instead, just pick the spot that looks best.

Types of SIPs

There are three main types of SIPs, although the SIPs themselves can be encased in different outer materials called facers or skins. The inner insulation core is usually made from expandable polystyrene (EPS), polyurethane or polyisocyanurate. Each delivers a strong, light building material with exceptional insulation properties.

How do they compare?

EPS cores offer a nominal R-value of R-4 to R-5 per inch (2.5 cm) and tend to be the lowest-cost option. Polyurethane and polyisocyanurate cores can be more expensive than EPS, but offer a nominal R-value of R-6 to R-7 per inch (2.5 cm). The assembled R-value of the panels may vary depending on type of skin or facer used.

Types of SIP skins

Most SIPs feature OSB as the skins or facers that encompass the inner foam insulation core of the panel. But other skins are available, including:

- Metal
- Fiber cement
- Fiber reinforced concrete
- Plywood
- Gypsum board

OSB is made with layers of precision-manufactured wood “strands” that are aligned, formed into panels and then pressed with an exterior grade adhesive resin such as LUPRANATE® isocyanate, a formaldehyde-free binder. It offers high-quality at a

cost-effective price and delivers uniformity, strength and versatility (OSB SIPs require a 0.5-inch gypsum wallboard covering as a fire thermal barrier).

Metal skins offer an increased range of design possibilities for profiles, textures and colors, as is available in the steel roll-forming industry. Metal- and cementitious-faced SIPs are not subject to wood rot or termites.







BASF ELASTOTITE® polyurethane adhesives provide a bond between EPS foam cores and all types of skins used in SIPs.

Sealants finish the job




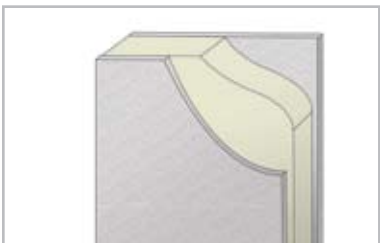

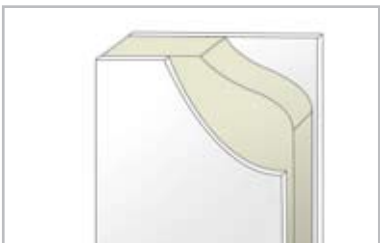
Insulating air sealants – such as BASF one- and two-component polyurethane foams – are installed from within the building structure to seal and insulate ‘hard-to-build’ areas, such as windows, doors, penetrations, parapets and soffits to create insulating air barrier system continuity from the foundation up through the walls and across the roof.

Polyurethane insulating air sealants are commonly used with SIPs to help join panels together quickly, increase energy efficiency and increase structural strength.

Expandable Polystyrene

		Facer	Adhesive
			
OSB	Metal	Plywood	
polyurethane/emulsion polymer	polyurethane/emulsion polymer	polyurethane/emulsion polymer	
			
Fiber cement	Fiber reinforced polyester	Gypsum	
polyurethane/emulsion polymer	polyurethane/emulsion polymer	polyurethane/emulsion polymer	

Polyurethane

		Facer	Adhesive
			
OSB	Metal	Plywood	
self-adhering	self-adhering	self-adhering	
			
Fiber cement	Fiber reinforced polyester	Gypsum	
self-adhering	self-adhering	self-adhering	

The role of the world's leading chemical company

BASF products are found almost everywhere in a building. Chemistry makes a significant contribution to the highest levels of energy, environmental and economic performance of buildings.

BASF chemistry contributing to the performance of SIPs can include:

- STYROPOR® EPS foam cores
- ELASTOPOR® or AUTOFROTH® polyurethane foam cores
- Custom-formulated polyurethane foam cores
- ELASTOTITE® polyurethane adhesives
- Polyurethane one- and two-component foam insulating air sealants
- LUPRANATE® formaldehyde-free binders for engineered wood and OSB
- Fiber reinforced facers

www.HighPerformanceCommunity.com/SIPs

www.basf.com/construction

www.basf-pfe.com

www.basf.com/pur-construction

www.plasticsportal.com

www.BetterHomeBetterPlanet.com

¹ BASF Corporation Time & Motion Study November 2006. Submitted to BuildingInsight, LLC. Conducted by Reed Construction Data/RSMMeans

² In 2005, the BASF Eco-Efficiency Analysis process won three major awards of interest to the building and construction industry: the Design for Sustainability Award (Society of Plastics Engineers), the Presidential Green Chemistry Challenge Award (U.S. Environmental Protection Agency), and the Best Sustainable Practice Award in the Sustainable Research, Development, Construction Process and Demonstration (Sustainable Buildings Industry Council).

³ Energy Savings from Small Near-Zero-Energy Houses, Oak Ridge National Laboratory, 2002

⁴ OCTOBER 2006 METRO ECONOMIES REPORT, HOUSING AND ENERGY OUTLOOK, Household Budgets in the U.S. and Its Metro Economies: Energy and Housing Costs, United States Conference of Mayors

STYROPOR®, ELASTOPOR®, AUTOFROTH®, LUPRANATE®, ELASTOTITE® and Helping Make Buildings Better™ are trademarks of BASF Corporation.

Fortified...for safer living® is a registered trademark of the Institute for Business & Home Safety.

LEED® is a registered trademark of the United States Green Building Council.

ENERGY STAR® is a registered trademark of the Environmental Protection Agency.

GreenGuard® is a registered trademark of Air Quality Services Inc.

WHILE THE DESCRIPTIONS, DESIGNS, DATA AND INFORMATION CONTAINED HEREIN ARE PRESENTED IN GOOD FAITH AND BELIEVED TO BE ACCURATE, THEY ARE PROVIDED FOR GUIDANCE ONLY. BECAUSE MANY FACTORS MAY AFFECT PROCESSING OR APPLICATION/USE, BASF RECOMMENDS THAT THE READER MAKE TESTS TO DETERMINE THE SUITABILITY OF A PRODUCT FOR A PARTICULAR PURPOSE PRIOR TO USE. NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, INFORMATION, DATA OR DESIGNS PROVIDED BE CONSIDERED A PART OF BASF'S TERMS AND CONDITIONS OF SALE. FURTHER, THE DESCRIPTIONS, DESIGNS, DATA, AND INFORMATION FURNISHED BY BASF HEREUNDER ARE GIVEN GRATIS AND BASF ASSUMES NO OBLIGATION OR LIABILITY FOR THE DESCRIPTION, DESIGNS, DATA OR INFORMATION GIVEN OR RESULTS OBTAINED, ALL SUCH BEING GIVEN AND ACCEPTED AT THE READER'S RISK.

This material is printed by an FSC Certified Printer on Mohawk Options 100% PCW – paper which is manufactured entirely with non-polluting wind-generated energy and contains 100% postconsumer recycled fiber. This paper is also certified by Green Seal, and by SmartWood for FSC standards which promote environmentally appropriate socially beneficial and economically viable management of the world's forests.



Paper Manufactured
With Green-e Certified
Renewable Energy



www.green-e.org



Recycled
Supporting responsible
use of forest resources

Cert no. SMI-COC 1541
www.fsc.org
© 1996 Forest Stewardship Council

The Chemical Company